

## STAYPLATES


Stayplates ensure the blocks in a Hawke rectangular system (tolerant and blank ones) are fixed in position after compression.

A stayplate should be placed above each complete row of insert/filler blocks. However, never on the last top row (underneath the compression plate) and never below the last bottom row of blocks.


- ◆ Available in AISI 304 stainless steel. AISI 316 and other materials under request.
- ◆ High pressure stayplates (Ref.931/P) are to be used in applications where the pressure requirement is greater than 3.5 bar.



### Hawke standard Stayplate

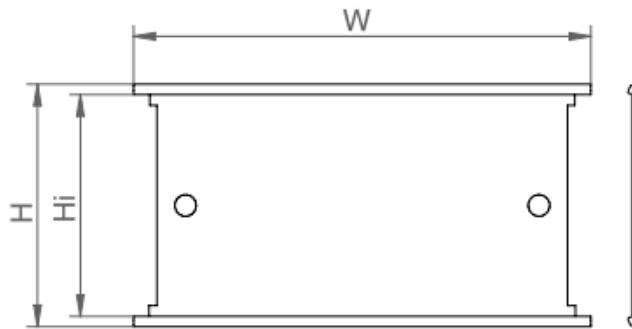

### Hawke high pressure Stayplate

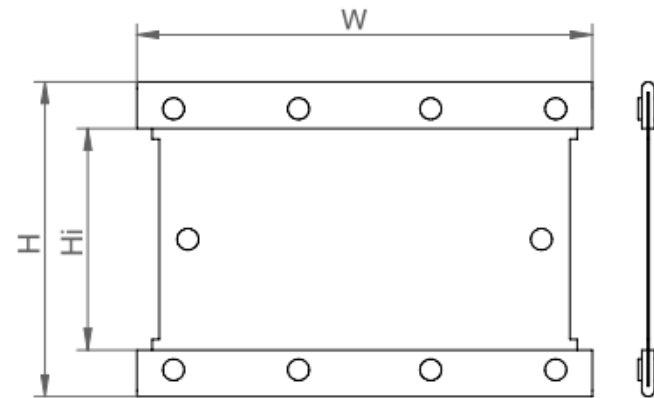

DESCRIPTION	W (mm)	H (mm)	Hi (mm)
Stayplate 931 60mm	68	68	62
Stayplate 931 120mm	128	68	62
High Pressure Stayplate 931/P 120mm	128	88	62