

◆→ TOLERANT BLOCKS

Hawke HF EMC tolerant blocks are designed to accommodate different cables passing through the frame.


Its special design with five contact points allows the blocks to accommodate different diameters within the same block and accept variances in cable/pipe diameters.

Silver-loaded paint and copper strip wrapping ensures correct shielding.



CHARACTERISTICS

- ◆ Made of zero halogen, intumescent elastomeric polymer.
- ◆ No modification of the block needed during installation. Zero waste.
- ◆ Sealing grooves in the internal faces ensures correct contact all along your cable.

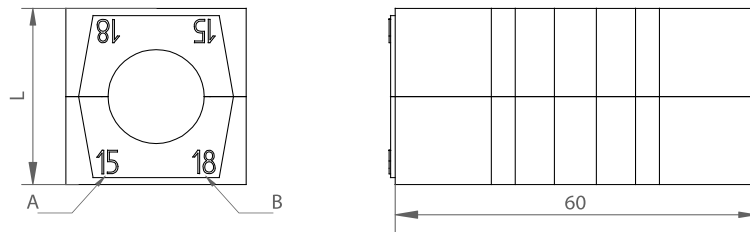

DESCRIPTION	L (mm)	CABLE AND PIPE DIAMETER		WEIGHT (kg)
		LABEL A MINIMUM (mm)	LABEL B MAXIMUM (mm)	
HF153/E	15	3	5	0,02
HF155/E	15	5	7	0,02
HF157/E	15	7	9	0,01
HF203/E	20	3	6	0,03
HF206/E	20	6	9	0,03
HF209/E	20	9	12	0,03
HF2011/E	20	11	14	0,02
HF2013/E	20	13	16	0,02
HF3012/E	30	12	15	0,05
HF3015/E	30	15	18	0,06
HF3018/E	30	18	21	0,05
HF3021/E	30	21	24	0,04
HF4012/E	40	12	15	0,12
HF4015/E	40	15	18	0,12
HF4022/E	40	22	25	0,10
HF4025/E	40	25	28	0,09
HF4028/E	40	28	31	0,08



→ TOLERANT BLOCKS

DESCRIPTION	L (mm)	CABLE AND PIPE DIAMETER		WEIGHT (kg)
		LABEL A MINIMUM (mm)	LABEL B MAXIMUM (mm)	
HF4031/E	40	31	34	0,07
HF6031/E	60	31	34	0,22
HF6034/E	60	34	37	0,21
HF6037/E	60	37	40	0,20
HF6040/E	60	40	43	0,19
HF6043/E	60	43	46	0,18
HF6046/E	60	46	49	0,16
HF6049/E	60	49	52	0,14
HF6052/E	60	52	54	0,11
HF9053/E	90	53	56	0,46
HF9056/E	90	56	59	0,44
HF9059/E	90	59	62	0,42
HF9062/E	90	62	65	0,40
HF9065/E	90	65	68	0,39
HF9068/E	90	68	71	0,36
HF12072/E	120	72	75	0,79
HF12075/E	120	75	78	0,75
HF12078/E	120	78	81	0,71
HF12081/E	120	81	84	0,67
HF12084/E	120	84	87	0,64
HF12087/E	120	87	90	0,61
HF12090/E	120	90	93	0,58
HF12093/E	120	93	96	0,55
HF12096/E	120	100	100	0,52